Schools Parks Day Cares Play Areas









# PlayTiles® by dinoflex











### PlayTiles®

Dinoflex PlayTiles® are specifically designed to reduce injuries from falls under the guidelines set out under the ASTM F1292 standards. These tiles are ideal for schools, parks, daycares, multi-family playgrounds, backyard play areas and can even be used with indoor or outdoor climbing walls. The unique interlocking system can easily be installed over concrete, asphalt or compacted gravel. In addition, these tiles provide you the option of incorporating designs and symbols into the surface to make it even more appealing to children – imagine hopscotch or the alphabet built right into your playground surface. Use Dinoflex PlayTiles® to create a fully accessible playground surface that can be used in virtually any weather and is tough enough to stand up to the most active children.

# 04,58




### Fall Height Thickness 4 ft. / 1.2 m 1 1/2" / 38 mm

6 ft. / 1.8 m 2 1/4" / 57 mm 8 ft. / 3.0 m 3 1/2" / 89 mm

### Need a higher fall height?

Ask about our Dinofall system that creates a fall height of up to 11 ft.

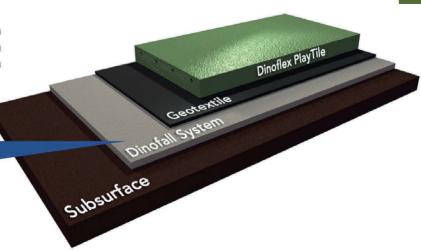

### Interactive Tiles:

Turn your playground into a one-of-a kind space that promotes learning, creativity and fun by adding one or more of our colorful Game sets to your surface.



Traffic Set



Alphabet Set



Hopscotch Set



Space Set






### Colors:

### Pigment\*




<sup>\*</sup>Variation in color occurs in all pigmented products. Pigmented tiles are not recommended for high traffic areas because of potential pigment loss.

### **EPDM Speckled**

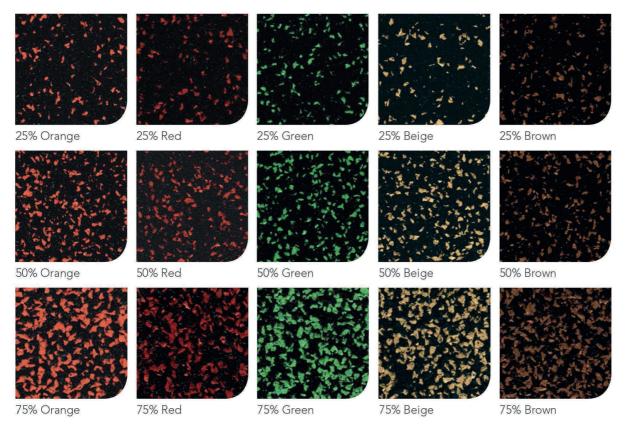

Note: Please select colors based on actual samples.

### Interlocking System

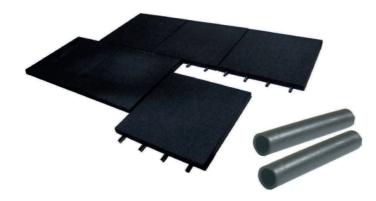

Dinoflex self-aligning interlocking system provides for a fast and accurate installation.

Interlocking tubes at no charge with every order.

### Accessories:



1.5" Outside Corner



Inside Corner



Outside Corner



1.5" Wedge



2.25" Wedge



3.5" Wedge



Wheelchair Ramp







Adhesives (tube, 2 gallon, and 5 gallon)



Finishing Kit





# **Notes**

# **Notes**

### PlayTiles® Technical Data

TEST	DESCRIPTION	PLAYTILES
ASTM F1292-09	Impact Attenuation	Results: Passed - Shock absorbing properties tested between 30 °F - 120 °F (0 °C - 50 °C). G-Max and HIC measured may not exceed 200 and 1000, respectively at a given fall height.
	Slip Resistance	Results: Passed - Dry .73, Wet .81
	Aging Weathering	Results: No cracking, crazing, whiting or noticeable color change.
	Freeze / Thaw	Results: No cracking, crazing, whiting or noticeable color change.

### Dimensions:

- $19 1/2" \times 19 1/2" = 2.64 \text{ ft}^2 (49.5 \text{ cm} \times 49.5 \text{ cm} = 0.24 \text{ m}^2)$
- $24'' \times 24'' = 4 \text{ ft}^2 \text{ (61 cm} \times 61 \text{ cm} = 0.37 \text{ m}^2\text{)}$

### Features:

- Easily installs on compacted soft ground or solid surfaces
- Meets ASTM F1292-09
- Water permeable
- High traction
- Durable
- Low maintenance
- Meets ADA standards
- Qualifies for LEED credits
- Interlocking system No glue required

### Applications:

- Schools & Parks
- Day Cares
- Preschools
- Back Yards
- Play Areas
- Climbing Walls

### 10 YEAR LIMITED WARRANTY











**BC Offices**Burnaby & Kelowna

AB Offices
Calgary & Edmonton

To reach the nearest Habitat office:

1 (866) HABITAT (422-4828) • Fax: 1 (866) 294-4002 info@habitat-systems.com • www.habitat-systems.com